



Victaulic® coupling

- designed with a heavy housing for pressure up to 34,5 bar
- the housing key is wider than standard and designed to clamp the bottom of the groove thus providing an essentially rigid joint
- eliminates movements at the connection
- reduces linear or angular movement
- useful for valve connections and other points where rigidity is required
- fast and easy assembly
- allows misalignments up to 130°
- made of coated ductile iron, galvanised on request
- EPDM gasket
- zinc plated carbon steel bolts

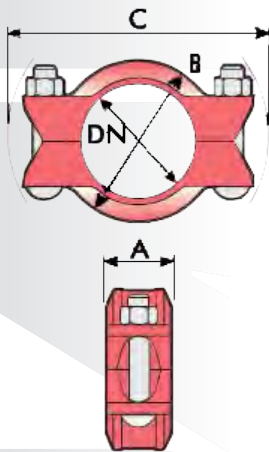

Victaulic® grooved flexible coupling, PN10

DN	PN	A	B	C	KG
2"	10	51	89	168	1,5 KG
3"	10	51	121	197	2,0 KG
4"	10	54	152	245	3,4 KG
6"	10	64	219	321	7,3 KG



Victaulic® grooved flexible socket, PN16

D - E x d	DN	PN	L	L ₁
75 - 63 x 2"	2"	16	93	44
110 - 90 x 3"	3"	16	132	63
125 - 110 x 4"	4"	16	151	71
180 - 160 x 6"	6"	10	183	90

- PVC-U female solvent socket
- metric series
- EN 1452-3