


Casing End Seal Type KFWS



- from high quality PVC, **pressure tight up to 1,0 bar**
- cover dimension range from DN 50 to DN 1100 mm
- additional cable duct opening (CDO) available on request
- max working temperature +55°C
- Shore hardness approx.. 50°
- breaking elongation 400 %
- Tensile strength 11 N/mm²
- initial tear resistance 27 N/mm
- due to the exceptional flexibility and with a wall thickness of 9 to 11 mm they accommodate axial and radial movements between casing and carrier pipe
- delivered with special sealing adhesive and strong stainless steel bands and fasteners

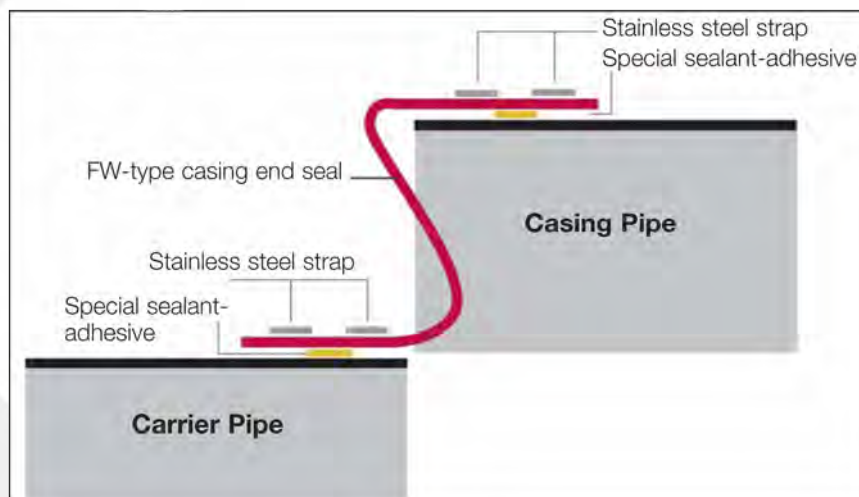

Casing End Seal Type KFWS

OD x DN mm	OD x DN mm
50 x 125	500 x 600
50 x 200	500 x 650
80 x 200	550 x 650
100 x 200	550 x 700
100 x 250	600 x 700
125 x 200	600 x 750
125 x 250	650 x 750
150 x 250	650 x 800
150 x 300	700 x 800
200 x 250	700 x 850
200 x 300	750 x 850
200 x 350	750 x 900
250 x 350	800 x 900
250 x 400	800 x 950
300 x 400	850 x 1000
300 x 450	900 x 1000
350 x 450	900 x 1050
350 x 500	950 x 1050
400 x 500	950 x 1100
400 x 550	1000 x 1100
450 x 550	1050 x 1200
450 x 600	1100 x 1200