



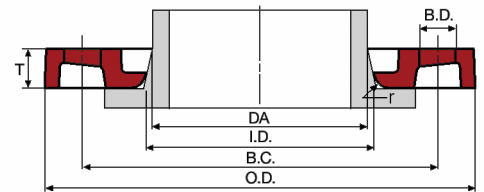

- Profiled Ductile Iron Flange GGG40, coated with blue **PPA571 AQUA** Thermoplastic, free of BPA (Bisphenol)
- especially designed for use in mining, seawater and water applications
- coating thickness 400 to 600 microns, has water approvals WRAS, AS/NZS 4020, DVGW, KTW, AS and NSF
- for PE, PP, PVDF butt welding flange adaptors
- available in dimensions from DN 40 to DN 600
- PN 16 according to ISO/DIN 2501-EN 1092
- flanges have a safety factor of 2
- highly resistant against corrosion, chemicals, blistering, flaking, UV light, cold temperatures, pollutants and cracking
- chemical resistance at PH values from 2 to 13, suitable for contact with waste water according to EN 598

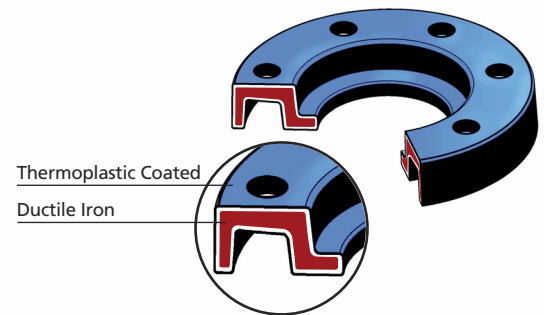

DA (mm)	DN (mm)	Code	Outside Dia. O.D.	Inside Dia. I.D.	Flange Thickness T	Bolt Circle B.C.	Bolt Hole B.D.	Bolt Count N	Bolt Size M	Radius r	Operating Pressure max. (bar)	Weight kg/pc.
50	40	DF2DI 50-10	150	62	16	110	18	4	M16	3	16	1,0
63	50	DF2DI 63-10	165	78	16	125	18	4	M16	3	16	1,1
75	65	DF2DI 75-10	185	92	16	145	18	4	M16	3	16	1,4
90	80	DF2DI 90-10	200	108	19	160	18	8	M16	3	16	1,6
110	100	DF2DI 110-10	220	128	19	180	18	8	M16	3	16	1,8
125	100	DF2DI 125-10	220	135	19	180	18	8	M16	3	16	1,7
140	125	DF2DI 140-10	250	158	19	210	18	8	M16	3	16	2,1
160	150	DF2DI 160-10	285	178	19	240	22	8	M20	3	16	2,6
180	150	DF2DI 180-10	285	188	19	240	22	8	M20	3	16	2,5
200	200	DF2DI 200-16	340	235	23	295	22	12	M20	4	16	4,0
225	200	DF2DI 225-16	340	238	23	295	22	12	M20	3	16	3,9
250	250	DF2DI 250-16	405	288	29	355	26	12	M24	3	16	6,6
280	250	DF2DI 280-16	405	294	29	355	26	12	M24	3	16	6,5
315	300	DF2DI 315-16	460	338	34	410	26	12	M24	3	16	8,6
355	350	DF2DI 355-16	520	376	39	470	26	16	M24	4	16	14,4
400	400	DF2DI 400-16	580	430	43	525	30	16	M27	4	16	17,0
450	500	DF2DI 450-16	715	517	46	650	33	20	M30	6,5	16	27,0
500	500	DF2DI 500-16	715	533	46	650	33	20	M30	7	16	24,4
560	600	DF2DI 560-16	840	618	55	770	36	20	M33	6	16	36,2
630	600	DF2DI 630-16	840	645	55	770	36	20	M33	6	16	43,4