


Compensating Wall Seal ROVDW



- for sealing pre-insulated pipelines and for gas and water utility services
- accommodate radial and axial movements between casing and carrier pipe
- made from ROTTOLIN PVC Plastisol soft, red colour
- DN 50 to DN 1100 mm
- wall thickness 6 to 8 mm, seamless
- pressure resistance up to 1 bar
- working temperature max. +55°C
- Shore A Hardness at 23°C 50°
- Tensile Strength 11 N/mm²
- Tensile Strain at break 410 %
- Tear Strength 27 N/mm²
- without punched openings, subsequent tensions will not cause cracks
- to ensure tightness, the annular space should not exceed 70 mm
- delivered with two stainless steel clamping bands and special sealing adhesive

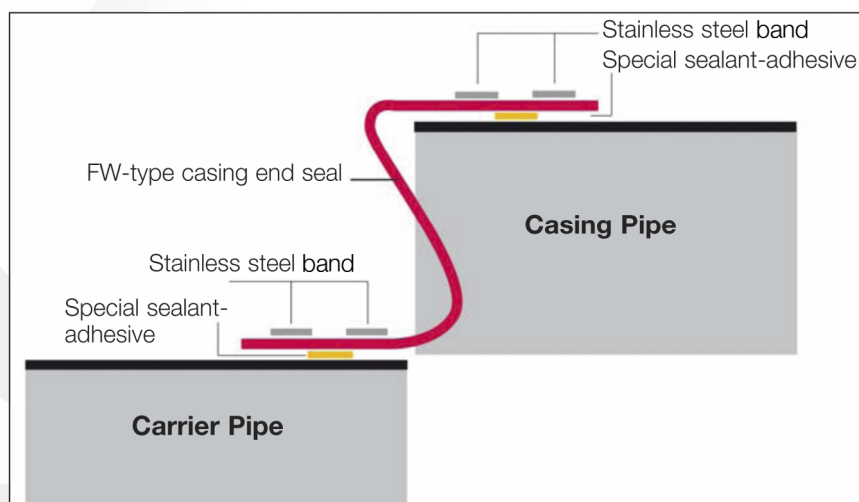

Compensating Wall Seal ROVDW

| Pipe OD mm | Core bore mm | outer diameter collar Pressure plate | Hole circle Pressure plate |
|------------|--------------|--------------------------------------|----------------------------|
| 90 | 150 | 292 | 265 |
| 110 | 200 | 340 | 305 |
| 125 | 200 | 340 | 305 |
| 140 | 250 | 389 | 360 |
| 160 | 250 | 389 | 360 |
| 200 | 300 | 450 | 410 |
| 225 | 300 | 450 | 410 |
| 250 | 350 | 500 | 460 |
| 315 | 400 | 500 | 460 |
| 355 | 450 | 550 | 510 |
| 400 | 500 | 600 | 560 |
| 450 | 550 | 650 | 610 |
| 500 | 600 | 700 | 660 |
| 560 | 650 | 750 | 710 |
| 630 | 700 | 800 | 760 |
| 670 | 800 | 850 | 810 |
| 710 | 800 | | |
| 810 | 900 | | |
| 910 | 1000 | | |

