


Socket

d	Z	B (=max.tol. +15%)	PN	Type	pc/box
90	32	53	16	B	56
110	41	64	16	B	25
125	36	72	7.5	B	22
125	47	72	16	B	16
140	46	80	7.5	B	10
140	60	80	16	B	10
160	46	90	7.5	B	10
160	60	90	16	B	10
200	48	111	7.5	B	9
200	63	111	12.5	B	1
225	65	125	7.5	B	1
225	74	125	12.5	B	1
250	68	137	7.5	B	1
250	85	137	10	B	1
280	100	153	10	B	1
315	75	172	7.5	B	1
315	90	172	10	B	1
355	125	193	6	B	1
400	140	216	6	B	1

Reducing Sockets PVC-U

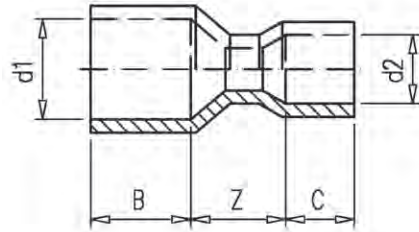

Reducing socket

d1	d2	Z	B	C	PN	pc/box
63	50	32	40	33	12.5	150
75	50	37	46	33	7.5	100
75	63	33	46	40	12.5	100
90	50	35	53	33	12.5	50
90	63	55	53	40	10	50
90	75	40	53	46	12.5	72
110	75	65	64	46	7.5	50
110	90	60	64	53	12.5	45
125	90	70	72	53	10	24
125	110	60	72	64	10	24
140	110	55	80	64	6	15
140	125	65	80	72	10	12
160	110	95	90	64	6	12
160	125	80	90	72	10	12
160	140	70	90	80	10	8
200	125	120	111	72	6	6
200	140	115	111	80	6	8
200	160	100	111	90	10	8
225	160	125	125	90	6	1
225	200	80	125	111	10	1
250	200	115	137	111	10	1
250	225	90	137	125	10	1
280	225	140	153	125	6	1
280	250	115	153	137	10	1
315	225	155	172	125	6	1
315	250	200	172	137	6	1
315	280	175	172	153	10	1
355	315	175	193	172	6	1
400	315	165	216	172	6	1
400	355	155	216	193	6	1