

Strainer

- body PE-100, SDR 17,6 with High Pressure (HP) Flanges drilled to EN 1092-1 PN 10
- DN 80 - DN 150
- with heavy duty screw connection for removing the complete gully trap
- PVC-U screen cage in gully trap with 0,5 mm perforated screen
- for purging the gully trap can be connected to the female brass connection at the bottom of the gully trap
- with stainless steel external reinforcement and brass insert with 1" female thread




PVC-U screen cage with 0,5 mm perforated PVC-U screen




DN	d1	SDR	L	Z	G	KG
80	90	11	310	279	1"	11,0
100	110	11	350	410	1"	20,5
100	125	11	350	410	1"	25,0
125	140	11	400	415	1"	25,0
150	160	17	480	571	1"	31,0

other dimension on request

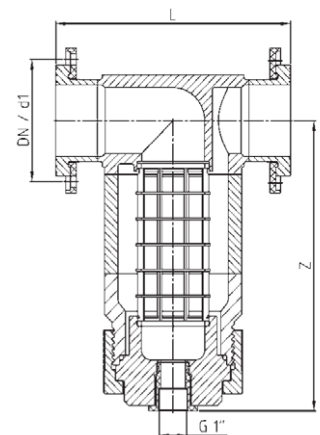

Suction Strainer

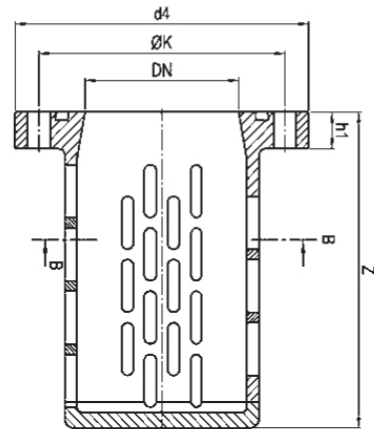

- body PE-100 SDR17/11 with fixed flange and integrated EPDM O-ring, no additional gasket required
- DN80 - DN300
- according to DIN 3247
- flange drilled according to DIN 2501 / EN1092-1 PN10
- flowrate equivalent to 3-dimensional cross section of the nominal diameter
- prevent large scale contamination in main or/ extractor lines (Strainer Lines)
- optional insertion version available as well as other dimensions

DN	d4	h1	Z	K	Bolts	KG
80	200	25	225	160	8 x M16	2,5
100	220	30	250	180	8 x M16	2,6
125	250	30	280	210	8 x M16	2,7
150	286	35	300	240	8 x M20	3,0
200	340	40	400	295	8 x M20	5,6
250	395	40	495	350	8 x M20	8,7
300	445	45	585	400	8 x M20	14,8