


Compensating Wall Seal ROOD



- for sealing pre-insulated pipelines and for gas and water utility services
- accommodate radial and axial movements between casing and carrier pipe
- made from ROTTOLIN PVC Plastisol soft, red colour
- DN 50 to DN 1100 mm
- wall thickness 6 to 8 mm, seamless
- pressure resistance up to 1 bar
- working temperature max. +55°C
- Shore A Hardness at 23°C 50°
- Tensile Strength 11 N/mm²
- Tensile Strain at break 410 %
- Tear Strength 27 N/mm²

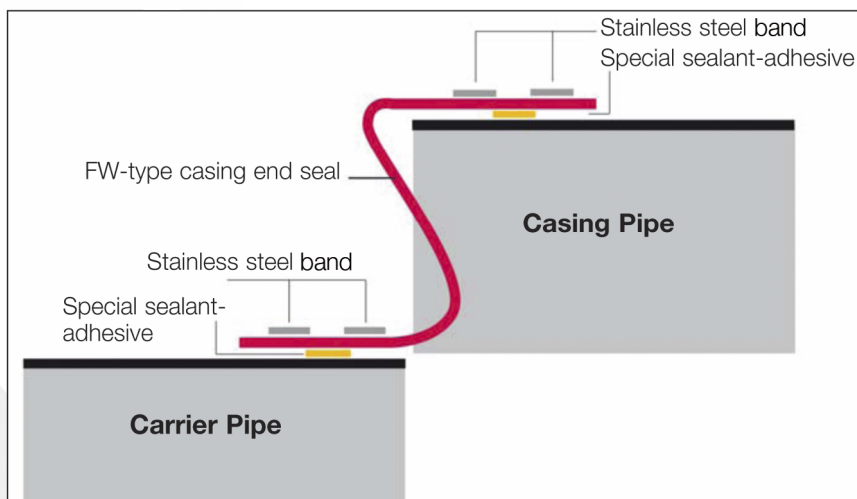

Compensating Wall Seal ROOD

Pipe OD mm	Core bore mm	outer diameter collar Pressure plate	Hole circle Pressure plate
50 - 135	150	292	265
135 - 185	200	340	305
185 - 235	250	389	360
235 - 285	300	450	410
285 - 335	350	500	460
335 - 385	400	550	510
385 - 435	450	600	560
435 - 485	500	650	610
485 - 535	550	700	660
435 - 585	600	750	710
585 - 635	650	800	760
635 - 685	700	850	810
685 - 785	800	990	940
785 - 885	900	1060	1010

