


## Casing End Seal ROWS



- for sealing pre-insulated pipelines and for gas and water utility services
- accommodate radial and axial movements between casing and carrier pipe
- made from ROTTOLIN PVC Plastisol soft, red colour
- DN 50 to DN 1100 mm
- wall thickness 9 to 11 mm, seamless
- pressure resistance up to 1 bar
- working temperature max. +55°C
- Shore A Hardness at 23°C 50°
- Tensile Strength 11 N/mm<sup>2</sup>
- Tensile Strain at break 410 %
- Tear Strength 27 N/mm<sup>2</sup>
- without punched openings, subsequent tensions will not cause cracks
- to ensure tightness, the annular space should not exceed 70 mm
- delivered with two stainless steel clamping bands and special sealing adhesive

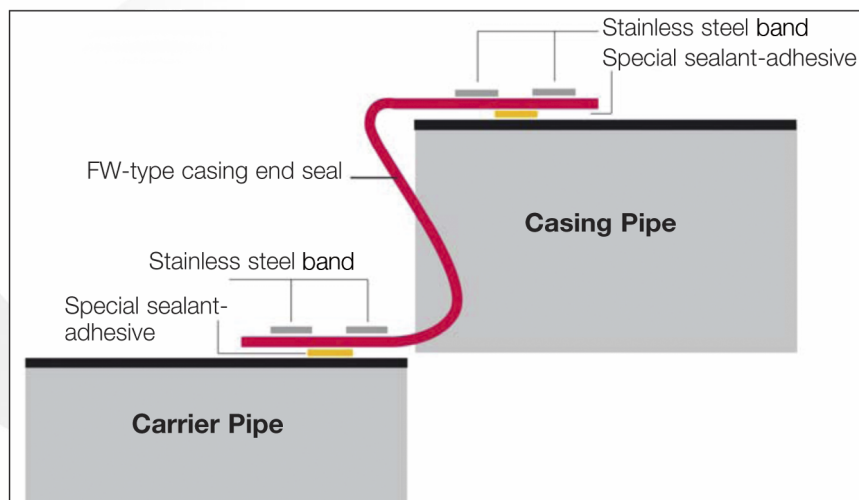

## Casing End Seal Type KFWS

OD x DN mm
DN 50 x 125 mm
DN 50 x 200 mm
DN 80 x 200 mm
DN 100 x 200 mm
DN 100 x 250 mm
DN 125 x 200 mm
DN 125 x 250 mm
DN 150 x 250 mm
DN 150 x 300 mm
DN 200 x 250 mm
DN 200 x 300 mm
DN 200 x 350 mm
DN 250 x 350 mm
DN 250 x 400 mm
DN 300 x 400 mm
DN 300 x 450 mm
DN 350 x 450 mm
DN 350 x 500 mm
DN 400 x 500 mm
DN 400 x 550 mm
DN 450 x 550 mm
DN 450 x 600 mm
DN 500 x 600 mm
DN 500 x 650 mm
DN 550 x 650 mm
DN 550 x 700 mm
DN 600 x 700 mm
DN 600 x 750 mm
DN 650 x 750 mm
DN 650 x 800 mm
DN 700 x 800 mm
DN 700 x 850 mm
DN 750 x 850 mm
DN 750 x 900 mm
DN 800 x 900 mm
DN 800 x 950 mm
DN 850 x 1000 mm
DN 900 x 1000 mm
DN 900 x 1050 mm
DN 950 x 1050 mm
DN 950 x 1100 mm
DN 1000 x 1100 mm
DN 1050 x 1200 mm